

ACCEPTED VERSION

Li, J. N.; Withayachumnankul, Withawat; Chang, Shengjang; Abbott, Derek
[Practical method for determining inductance and capacitance of metamaterial resonators](#)
Electronics Letters, 2012; 48(4):225-226

© The Institution of Engineering and Technology 2012

"This paper is a postprint of a paper submitted to and accepted for publication in Electronics Letters and is subject to Institution of Engineering and Technology Copyright. The copy of record is available at IET Digital Library"

<http://dx.doi.org/10.1049/el.2011.3547>

<http://www.theiet.org/resources/journals/eletters/authors.cfm#Pre-andpostprintpolicy>

PERMISSIONS

The author may also post **postprints** of their work (reviewed, revised and accepted for publication by the IET, but not the published PDF) on repositories, servers and websites of any sort, provided that these servers are operated by the author's institution or the funding body contributing to the research. To comply with funding requirements, authors may also deposit their work (reviewed, revised and accepted for publication by the IET, but not the published PDF) in repositories (or mirror sites) designated by the funding body.

The conditions attached to this are as follows:

1. access to such servers is not for commercial use and does not depend on payment of access, subscription, or membership fees and
2. the following wording clearly appears on the front page of the postprint:
"This paper is a postprint of a paper submitted to and accepted for publication in [journal] and is subject to Institution of Engineering and Technology Copyright. The copy of record is available at IET Digital Library";
3. the postprint must be the author's version and not the IET version/PDF;
4. the postprint must not be posted prior to publication of the paper by the IET and when posted any preprint version should be removed.

2nd April 2013

<http://hdl.handle.net/2440/76162>

Practical method for determining inductance and capacitance of metamaterial resonators

Jining Li, Withawat Withayachumnankul, Shengjiang Chang, and Derek Abbott

A practical approach to determining the distributed capacitance and inductance of individual metamaterial resonators is demonstrated. By loading a set of lumped capacitors onto the resonator, the resonance frequency can be measured as a function of the load capacitance. The capacitance and inductance values of the resonator are then determined by relating the equivalent circuit model to the measurements. Although the measurement is limited to the microwave region owing to the availability of suitable lumped capacitors, the concept is useful in simulations over a wider frequency range. The obtainable parameters are useful for further metamaterial analyses or syntheses.

Introduction: Metamaterials are artificial composite materials engineered to possess unusual electromagnetic properties, such as negative permeability or negative refractive index. These properties are usually derived from a collection of sub-wavelength periodic metallic resonators [1]. Various designs of metamaterial resonators have been proposed to date, e.g., split-ring resonators (SRR) [2] or electric LC (ELC) resonators [3, 4]. In the quasistatic limit, a metamaterial single unit cell can be considered as an LC resonance circuit with its effective inductance and capacitance mainly governed by the resonator geometries and materials. In order to estimate the capacitance and inductance values, several analytical models based on the transmission line theory have been proposed but with a limited accuracy [5, 6].

In this paper, an empirical means is introduced to determine the LC parameters of metamaterials. In brief, a series of capacitors with different capacitances are loaded onto the resonator to alter the resonance frequency [7, 8]. Then, based on an equivalent circuit model of the resonator, the distributed inductance and capacitance can be determined from the observed relationship between the resonance frequency and the loaded capacitance. This reliable parameter estimation method is helpful in understanding and designing new functional metamaterials.

Designs and Method: Three common metamaterial resonators, as shown in Fig 1(a), are chosen to demonstrate the method. The first two designs, M1 and M2, are ELC resonators, and the third design, M3, is an SRR. In all of the designs, the dielectric gaps form the capacitors, while the conducting loops form the inductors. In normal operation, when the electric field polarisation of the incident wave is perpendicular to the gap, a surface current is induced in the loops. Similar to an LC resonance circuit, the structure becomes resonant when the energies stored in the capacitive gap and the inductive loop are equal. The resonance frequency follows the condition of $\omega_0 = 1/\sqrt{LC}$.

In order to determine the LC parameters of these resonators, a set of measurements for each resonator is needed. As discussed earlier, the resonance frequency strongly depends on the effective capacitance and inductance of the structure. Hence, a series of lumped capacitors with different known values are loaded on the gap region of the resonator to change the resonance frequency. Only a single unit cell for each metamaterial design is used in the measurement to preclude the contributions from mutual electric and magnetic interactions among resonators. The equivalent circuit of each structure with additional lumped capacitors is shown in Fig. 1(a). The resonance frequencies of M1, M2, M3 are respectively given by $f_1 = 1/\pi\sqrt{2L_s(C_d + C_s)}$, $f_2 = 1/2\pi\sqrt{2L_s(C_d + C_s)}$, and $f_3 = 1/2\pi\sqrt{L_s(C_d + C_s)}$.

Experiment setup: Each unit cell of the resonators is fabricated on a separated FR4 substrate with a thickness of 0.8 mm. The metal used for the resonators is gold-coated copper with a thickness of 35 μm . The structural parameters, as indicated in Fig. 1(a), are as follows: $l = 13$ mm, $a = 11$ mm, $b_1 = 3.6$ mm, $b_2 = 1.8$ mm, $g = 0.4$ mm, and $w = 0.8$ mm. For M1, M2, M3, these parameters result in an LC resonance at 3.4 GHz, 2.7 GHz, and 2.2 GHz, respectively. High-Q surface-mounted capacitors with various capacitances from 0.2 pF to 2.2 pF are chosen to connect across the gap regions of each resonator. Their capacitance tolerance is within 0.1 pF. All of the capacitors are in standard 0603 packages. For any measurement, a capacitor-loaded resonator is inserted in the middle of a pair of monopole antennas, as shown in Fig. 1(b). The antennas are then connected to an Agilent Technologies N5230A network analyser to measure the transmission coefficient S_{21} of the resonator normalised to that of free space. Several pairs of antennas are used to cover different resonance frequencies.

Results and discussion: The measured transmission magnitudes of the three resonators at different capacitance values are illustrated in Fig. 2. The resonance frequency shows a strong dependence on the mounted capacitor. As the loaded capacitance increases, the resonance frequency undergoes a red-shift from 2.48 GHz to 1.00 GHz for M1, from 1.76 GHz to 0.97 GHz for M2, and from 1.48 GHz to 0.93 GHz for M3.

As shown in Fig. 3, the resonance frequencies from the experiment and numerical simulation with CST Microwave Studio are in good agreement. The small discrepancies are likely to be from the interaction between the resonator and the monopoles. From these results, C_s and L_s can be determined by fitting the resonance model of the equivalent circuit to the experimental relation. From the proposed method, it is found that $C_s = 0.19$ pF and $L_s = 21.03$ nH for M1, $C_s = 0.21$

pF and $L_s = 9.53$ nH for M2, and $C_s = 0.23$ pF and $L_s = 26.34$ nH for M3. These extracted values can be used to back-calculate the resonance frequency of the unloaded resonator. For M1, M2, and M3, the back-calculated resonance frequencies are 3.6, 2.53, and 2.05 GHz, respectively, which are comparable to 3.47, 2.58, and 2.06 GHz obtained from the experiment.

Conclusion: It has been demonstrated that the effective LC parameters of a metamaterial element can be determined by comparing the equivalent circuit model to the observed relation between the resonance frequency and the loaded capacitance. The parameters obtained from this method can be used for, e.g., proving theoretical models or designing and optimising metamaterials. The coupling between the resonator and the probing antennas will be addressed in future work. The proposed method is applicable to resonators not only in the microwave region, where lumped capacitors are available, but also in other frequency ranges via simulation.

Acknowledgement

The authors acknowledge valuable discussion with Prof Christophe Fumeaux and technical assistance from Pavel Simcik and Henry Ho. Withawat Withayachumnankul acknowledges funding from ARC Australian Post-Doctoral Fellowship (DP1095151).

References:

- 1 Withayachumnankul W., and Abbott D. : 'Metamaterials in the terahertz regime', *IEEE Photon. J.*, 2009, **1**, pp. 99–118
- 2 Pendry J. B., Holden A. J., Robbins D. J., and Stewart W. J. : 'Magnetism from conductors and enhanced nonlinear phenomena', *IEEE Trans. Microwave Theory Tech*, 1999, **47**, pp. 2075-2084

3 Padilla W. J., Aronsson M. T., Highstrete C., Lee M., Taylor A. J., and Averitt R. D. : 'Electrically resonant terahertz metamaterials: Theoretical and experimental investigations', *Phys. Rev. B*, 2007, **75**, art. no. 041102

4 Schurig D., Mock J. J., and Smith D. R. : 'Electric-field-coupled resonators for negative permittivity metamaterials', *Appl. Phys. Lett.*, 2006, **88**, art. no. 041109

5 Shamonin M., Shamonina E., Kalinin V., and Solymar L. : 'Resonant frequencies of a split-ring resonator: analytical solutions and numerical simulations', *Microw. Opt. Techn. Lett.*, 2005, **44**, (2), pp. 133-136

6 Ishikawa A., Tanaka T., and Kawata S. : 'Frequency dependence of the magnetic response of split-ring resonators', *J. Opt. Soc. Am. B*, 2007, **24**, (3), pp. 510-515

7 Aydin K., and Ozbay E. : 'Capacitor-loaded split ring resonators as tunable metamaterial components', *J. Appl. Phys.*, 2007, **101**, art. no. 024911

8 Withayachumnankul W., Fumeaux C., and Abbott D. : 'Planar array of electric-LC resonators with broadband tunability', *IEEE Antennas Wireless Propag. Lett.*, 2011, **10**, pp. 577-580

Authors' affiliations:

J.N. Li (School of Electrical & Electronic Engineering, The University of Adelaide, Adelaide, SA 5005, Australia; and Institute of Modern Optics, Nankai University, Tianjin 300071, China)

W. Withayachumnankul (School of Electrical & Electronic Engineering, The University of Adelaide, Adelaide, SA 5005, Australia; and Faculty of Engineering, King Mongkut's Institute of Technology Ladkrabang, Bangkok 10240, Thailand)

S.J. Chang (Institute of Modern Optics, Nankai University, Tianjin 300071, China)

D. Abbott (School of Electrical & Electronic Engineering, The University of Adelaide,
Adelaide, SA 5005, Australia)

E-mail: andrewli@eleceng.adelaide.edu.au

Figure captions:

Fig. 1 (a) Schematics of three metamaterial elements and their equivalent circuits. The distributed capacitance and inductance are denoted by C_s and L_s , respectively, whilst the lumped capacitance is denoted by C_d . (b) Photo of the experimental setup showing a resonator inserted between two monopole antennas.

Fig. 2 Transmission magnitude of the three resonators with different loaded capacitors.

Fig. 3 Measured and simulated resonance frequencies as a function of the loaded capacitance. The fitting curves are determined from the equivalent circuit models.

Figure 1

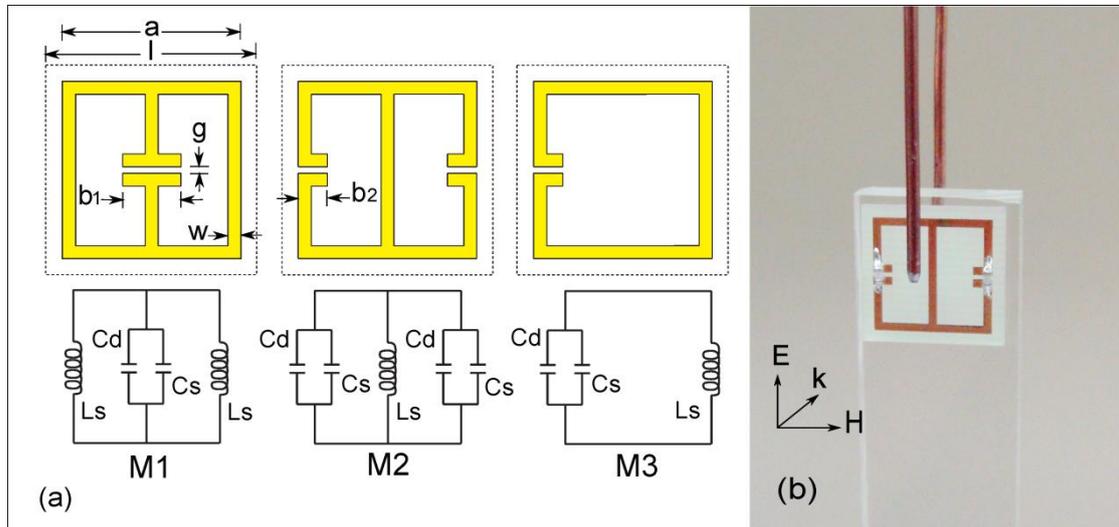


Figure 2

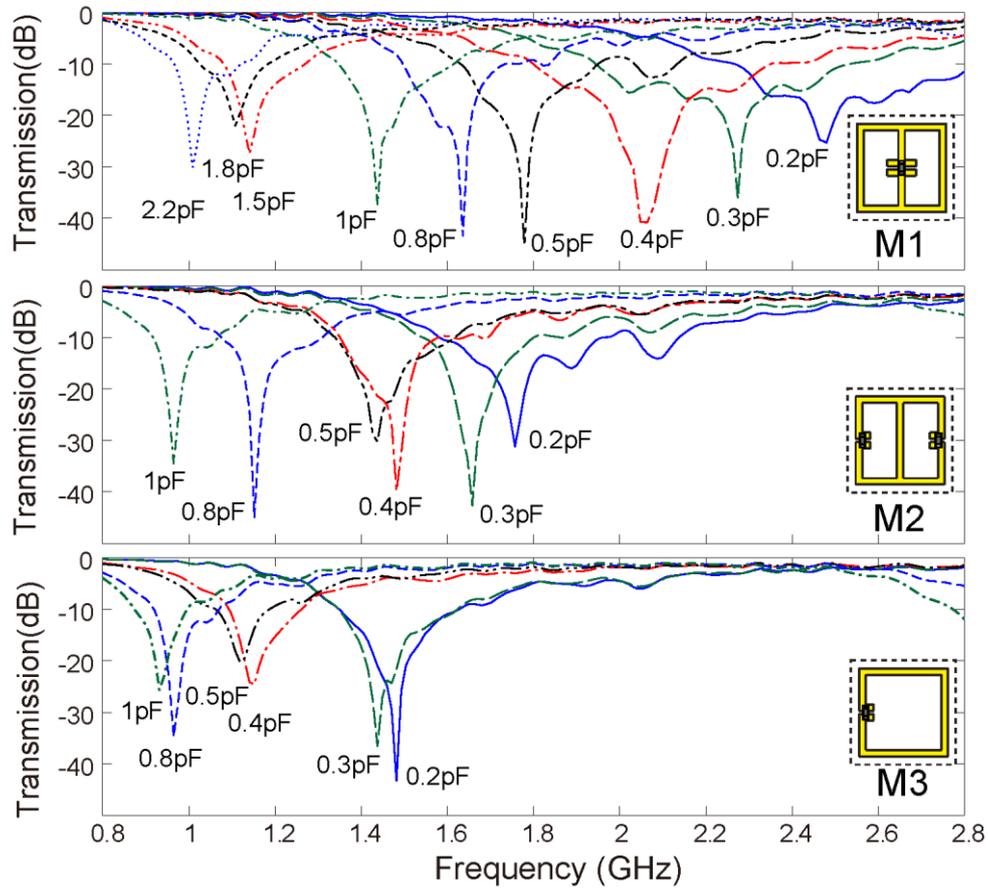


Figure 3

